




Netgear TA612V Phone Adapter Configuration Instructions

Version 1.0

A. Physical Connection

1. Connect the device as illustrated

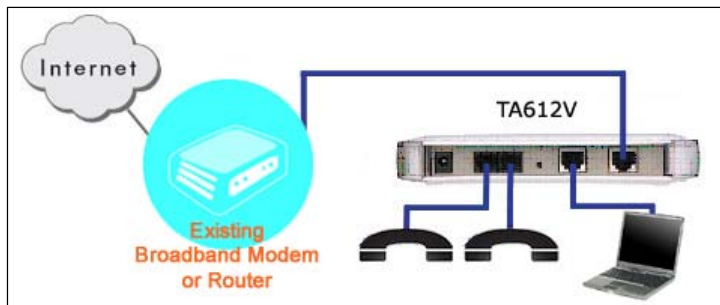

B. VoIP Settings

1. Type 192.168.61.1 onto the address bar of Internet Explorer
2. Key in username & password:
Username: admin
Password: password
3. Input the information as illustrated

VoIP Settings

Region USA ▼

Service

SIP Proxy **sip1.bbpglobal.com**

SIP Control Port **5190**

SIP Local Port **5190**

SIP Message TOS Value: Hex (default: 68)

Starting RTP Port

RTP Data TOS Value: Hex (default: b8)

Use Outbound SIP Proxy
Outbound SIP Proxy Address **sip1.bbpglobal.com**

Outbound Proxy Port **5190**

VAD NB. The port number of sip2.bbpglobal.com is 5060.

Silence Detect Time msec

ATPM Action Key

First-digit Timeout sec

Last-digit Timeout sec

STUN

Stun Interval Time min

STUN Port

STUN Server

Line 1

Line 1	
Line Enable	yes
Display Name	Extension #
Telephone Number	Extension #
User Name	Extension #
Password	Password
Register Expire Time (sec.)	300
Registration Head Start Time (sec.)	3
Anonymous Incoming Call	Allow
Distinctive Ring Valid	<input type="checkbox"/>
Prefer Ring ID	0
Prefer Fax Codec	Fax - T.38
Prefer Codec	G.729ab @ 40ms
Support Codec	<input checked="" type="checkbox"/> G.711mu <input checked="" type="checkbox"/> G.729ab <input type="checkbox"/> G.726 <input checked="" type="checkbox"/> G.711a
	UnRegister

Line 2 (if second account is obtained)

Line 2	
Line Enable	yes
Display Name	Extension #
Telephone Number	Extension #
User Name	Extension #
Password	Password
Register Expire Time (sec.)	300
Registration Head Start Time (sec.)	3
Anonymous Incoming Call	Allow
Distinctive Ring Valid	<input type="checkbox"/>
Prefer Ring ID	0
Prefer Fax Codec	Fax - T.38
Prefer Codec	G.729ab @ 40ms
Support Codec	<input checked="" type="checkbox"/> G.711mu <input checked="" type="checkbox"/> G.729ab <input type="checkbox"/> G.726 <input checked="" type="checkbox"/> G.711a
	UnRegister

DNS Servers

Time Server Setting				
Time Server Address: <input type="text"/>				
<hr/>				
DNS Servers				
<input type="checkbox"/> DNS SRV				
Primary DNS				
<input checked="" type="checkbox"/>	192	189	54	33
Secondary DNS				
<input checked="" type="checkbox"/>	192	189	54	17
<hr/>				
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>				

Click Apply and the device would restart.